

Model 910 Hot/wet Multi-Gas CEM

THE NEED

The Model 910 is a version of the Model 920 specifically configured for monitoring stack emissions on a mass rate basis. The standard configuration measures stack effluent temperature and velocity in addition to pollutant concentrations at stack conditions, enabling mass emission rates to be reported. With the addition of an optional zirconium oxide sensor, the Model 910 is capable of monitoring oxygen and providing oxygen corrected measurements.

The Model 910 is a multi-component analyzer capable of measuring up to five different gases simultaneously. The Model 910 is a complete system with a sample extraction and transport system designed for maintaining sample integrity. Housing options for the field unit include a cabinet or walk-in shelter built to your specifications.

The Model 910 performs analyses typically requiring two or more separate analyzers, making it an economical alternative when several gases must be monitored. The Model 910 performs all necessary sample gas and calibration gas flow management, and probe and sample line temperature control. The Model 910 is a full function Continuous Emissions Monitoring System (CEM) which requires the addition of only a sample probe and sample line to be fully operational.

THE MEASUREMENT

The Western Research® Model 910 uses our proprietary high resolution UV technology in a dual beam, multiple wavelength configuration. Resolution better than 0.02 nm is provided by high intensity, line source lamps. These sources emit at a fixed wavelength, providing great measurement stability, and emit low total power, removing the potential for sample photolysis. The high resolution enables unparalleled linearity over a wide dynamic range (less than 1% deviation over 4 to 5 orders of magnitude), which in turn leads to simple, robust data analysis. A six-position filter wheel enables one reference and five measure wavelengths. The dual beam configuration, combined with the reference measurement, ensures low noise performance, with minimal baseline and span drift.

UV measurements do not suffer from H₂O and CO₂ interference, as these species are transparent in the UV. This greatly simplifies sample handling. The Model 910 is a fully extractive, heated wet basis analyzer. The sample cell and all components in contact with the sample are heated above the dew points of all gases in the sample stream. This results in a simpler and more accurate calculation of gas concentrations, requiring no corrections for condensed and dissolved components. It also results in a simpler analytical system as there is no need for sample drying or conditioning. The Model 910 has built-in zero and span calibration and three zone temperature control.



BENEFITS

- Hot/wet analysis prevents errors associated with:
 - Correcting for water vapor
 - Absorption losses in driers
- Multi-component gas analysis (up to five species)
- Multi-range SO₂ measurement
- Independent NO and NO₂ measurement
- No H₂O or CO₂ interference
- Automated zero and span gas calibration
- Provides serial interface with plant DCS
- Incorporates flow measurement for emission rate calculations

APPLICATIONS

- CEM applications in:
 - Sulfur plants
 - Smelters
 - Coal, oil, and gas fired power plants
 - Industrial boilers

PERFORMANCE SPECIFICATIONS

Methodology: Multiple wavelength, high resolution, non-dispersive UV

Species Measured	Minimum Full Scale (see Note)	Maximum Full Scale
SO ₂	250 ppm	100%
NO	300 ppm	100%
NO ₂	300 ppm	100%
NOx	300 ppm	100%
H ₂ S	500 ppm	100%
NH ₃	500 ppm	100%

Note: Minimum full scale is based on $\pm 1\%$ full scale accuracy over 24 hours with auto zero disabled.

Accuracy¹: Better than 1% full scale

Reproducibility: Better than 0.5% full scale

Linearity: Better than 1% full scale

Response Time: Typically less than 30 s to T90 (excl. sample system)

Number of Gases: Up to 5 simultaneously (refer to AMETEK for possible combinations)

Power: 120 VAC $\pm 10\%$, 47 to 63 Hz or 220 VAC $\pm 10\%$, 47 to 63 Hz 600 W for analyzer only

Typical Sample Flow: 3 to 5 L/min (0.1 to 0.2 SCFM)

Sample Transport: Air aspiration

Sample Gas Temperature: Ambient to 302°F (150°C)

Temperature Control: Independent control of three zones (oven, sample line, probe)

Pressure and Temperature Compensation: Standard

Ambient Temperature²: 40°F to 120°F (5°C to 50°C)

Instrument Air: Minimum 30 psig, 1 CFM; instrument quality air

Physical Dimensions: 61 x 44 x 12 in. (1554 x 1118 x 305 mm)

Weight: approx. 160 lbs. (72 kg)

Approvals and Certifications:

NEC/CEC Class I, Division 2, Groups C & D

CENELEC EEx pd IIB T3

GOST 1ExpdIIBT3 (certification pending)

Complies with all relevant European Directives

GOST Pattern Approval

Communications:

Analog: 4 x 4 to 20 mA self powered

Digital: One RS-232 port for service diagnostics


One RS-422 with Modbus protocol

Relays: 3 independent sets of SPDT relays alarm conditions

Optional O₂: Integral Zirconium Oxide

¹ Accuracy may vary on some applications where multi-species measurement is required.

² Temperature drift is approximately 1 ppm/°C for the species listed. To achieve maximum accuracy and stability, you can either install the analyzer in a temperature controlled environment or zero the analyzer more frequently.

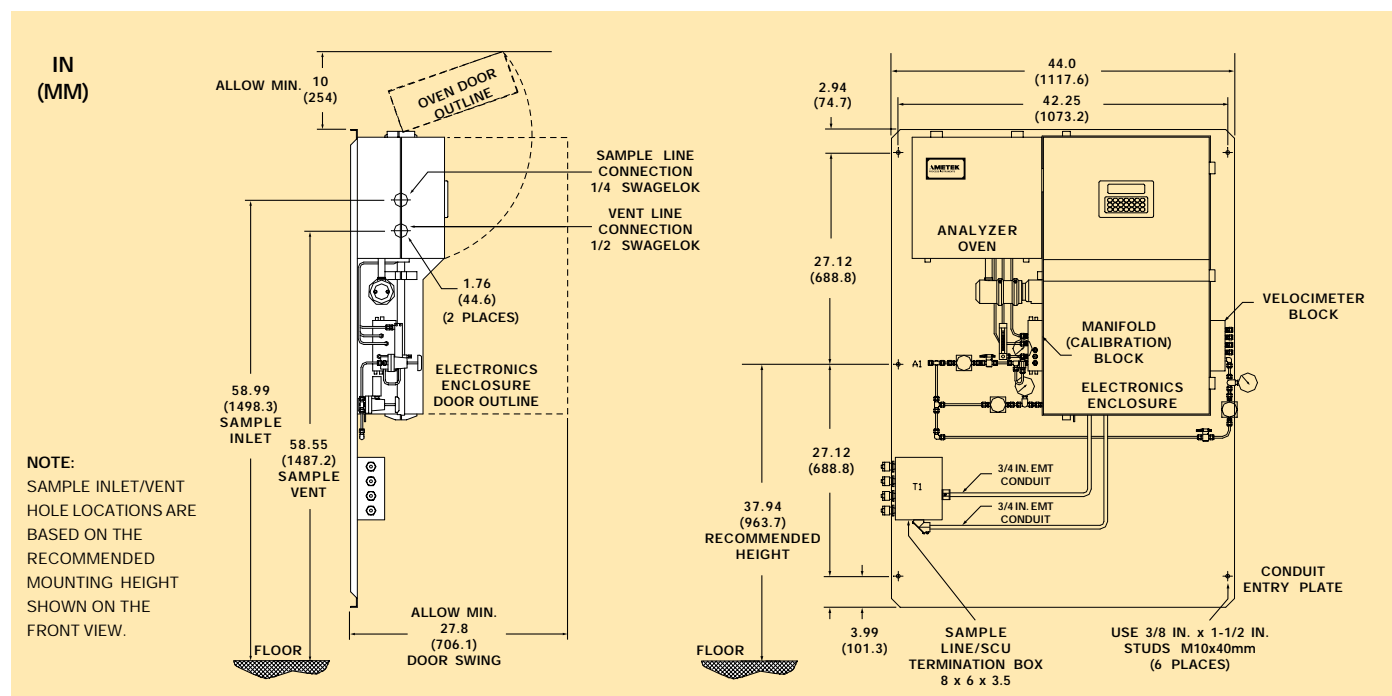

One of a family of innovative process analyzer solutions from AMETEK Process Instruments. Specifications subject to change without notice.

AMETEK®
PROCESS INSTRUMENTS

CANADA
2876 Sunridge Way N.E.
Calgary, AB T1Y 7H9
Ph. 403-235-8400
Fax 403-248-3550

CHINA
Rm #B5, 16F Harvest Bldg.
#585 Long Hua Xi Road
Shanghai, 200232
Ph. 86 21 64 284 067
Fax 86 21 64 875 329

FRANCE
3 Avenue Des Coudriers
Z.A. De L'Observatoire
78180 Montigny Le Bretonneux
Ph. 33 1 30 64 89 70
Fax 33 1 30 64 89 79

GERMANY
Postfach 2165
D-40644 Meerbusch OR
Rudolf-Diesel-Str. 16
D-40670 Meerbusch
Ph. 49 21 59 91 36 0
Fax 49 21 59 91 36 80

USA - Delaware
455 Corporate Blvd
Newark, DE 19702
Ph. 302-456-4400
Fax 302-456-4444

USA - Texas
9750 Whithorn Drive
Houston, TX 77095
Ph. 281-463-2820
Fax 281-463-2701



www.ametekpi.com
© 2001, by AMETEK, Inc. All rights reserved.
901PDF (080112)

